


**R-MAX-165 - OMNI ANTENNA VHF ALUMINUM +  
REINFORCED FIBER 158-168 MHz**

Power	500W
Gain	3,5 dBi (5,65 dBi)
Impedance	50 ohm
Material	Aluminum + fiber
R.O.E - S.W.R - T.O.S	1,2:1
Connector type	Female N connector
Polarization	Vertical
Wind load	190 km/h
Temperature (°C)	from -40° to 60°
Adjust type	Adjusted
Mastil diameter	0,030-0,058 m
Support	Included
Length	2,45 m
Weight	3,40 kg
Package dimensions	2,5 x 0,1 x 0,1 m



All specifications are subject to change without notice.

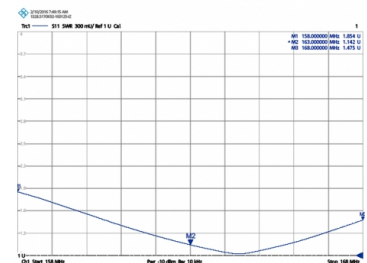